


# Tech Notes

## TS 19" Rails

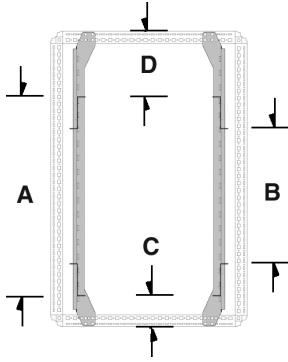

- Dim A – Dimension between 19" mounting surfaces on F&R rails
- Dim B – Dimension between 25 mm mounting flange on F&R rails
- Dim C – Dimension between 19" mounting surface and inside of F or R doors
- Dim D – Dimension between 19" mounting surface and inside of rear door

	Factory Position	Minimum <sup>1)</sup>	Maximum <sup>2)</sup>
<b>24"/600 mm Depth</b>			
Dim A	20.2" (513 mm)	9.4" (237.75 mm)	20.2" (513 mm)
Dim B	11.1" (281 mm)	0.3" (5.8 mm)	11.1" (281 mm)
Dim C	1.6" (41.25 mm)	1.7" (41.25 mm)	1.7" (41.25 mm)
Dim D	1.7" (42.75 mm)	12.6" (318 mm)	1.7" (42.75 mm)
<b>32"/800 mm Depth</b>			
Dim A	25.3" (642 mm)	9.4" (238 mm)	28.2" (715 mm)
Dim B	16.1" (410 mm)	0.3" (5.8 mm)	19.0" (483 mm)
Dim C	2.6" (66 mm)	1.6" (41 mm)	1.6" (41 mm)
Dim D	3.5" (89 mm)	20.4" (518 mm)	1.6" (41 mm)
<b>40"/1000 mm Depth</b>			
Dim A	29.2" (742 mm)	9.4" (238 mm)	36.0" (915 mm)
Dim B	20.1" (510 mm)	0.3" (5.8 mm)	26.9" (683 mm)
Dim C	2.6" (66 mm)	1.6" (41 mm)	1.6" (41 mm)
Dim D	7.4" (189 mm)	28.3" (718 mm)	1.6" (41 mm)
<b>42"/1050 mm Depth</b>			
Dim A	29.2" (742 mm)	9.4" (238 mm)	38.0" (965 mm)
Dim B	20.1" (510 mm)	0.3" (5.8 mm)	28.8" (733 mm)
Dim C	2.6" (66 mm)	1.6" (41 mm)	1.6" (41 mm)
Dim D	9.4" (239 mm)	30.2" (768 mm)	1.6" (41 mm)
<b>48"/1200 mm Depth</b>			
Dim A	29.2" (742 mm)	9.4" (238 mm)	43.9" (1114 mm)
Dim B	20.1" (510 mm)	0.3" (5.8 mm)	34.7" (882 mm)
Dim C	2.6" (66 mm)	1.6" (41 mm)	1.6" (41 mm)
Dim D	15.3" (389 mm)	36.1" (918 mm)	1.6" (41 mm)

<sup>1)</sup>Minimum – Rails extended towards door in nearest position

<sup>2)</sup>Maximum – Rails extended away from door in farthest position